

CS-565 Computer Vision

Nazar Khan

Department of Computer Science
University of the Punjab

12. Robust Estimation – RANSAC

Outliers



Figure: Correspondences obtained after matching SIFT descriptors. Most correspondences seem to be correct but some *outlier* correspondences can also be seen. Outliers will affect the estimation of the transformation between the two images. Author: N. Khan (2018)

Line Fitting

- ▶ Given points $(x_1, y_1), \dots, (x_N, y_N)$, find the parameters (m, c) of the *best-fit* line.
- ▶ One definition of best-fit could be in terms of sum-squared-error (SSE).

$$E(m, c) = \frac{1}{2} \sum_{n=1}^N (y_n - mx_n - c)^2$$

so that

$$(m^*, c^*) = \arg \min_{m, c} E(m, c)$$

Line Fitting

- ▶ Equating gradients to zero yields

$$\sum_{n=1}^N -x_n(y_n - m^*x_n - c^*) = 0$$

$$\sum_{n=1}^N -(y_n - m^*x_n - c^*) = 0$$

- ▶ Can be written as a linear system

$$\begin{bmatrix} \sum_{n=1}^N x_n^2 & \sum_{n=1}^N x_n \\ \sum_{n=1}^N x_n & \sum_{n=1}^N 1 \end{bmatrix} \begin{bmatrix} m^* \\ c^* \end{bmatrix} = \begin{bmatrix} \sum_{n=1}^N x_n y_n \\ \sum_{n=1}^N y_n \end{bmatrix}$$

- ▶ In such a fitting squared error due to point (x_n, y_n) is $(y_n - mx_n - c)^2$.

Line Fitting

- ▶ For a line that passes through the inliers, the outliers will contribute large values to the SSE.
- ▶ Therefore, minimizing SSE will cause the best-fit line to pass closer to the outliers.

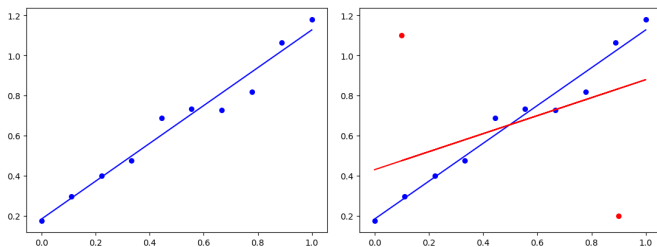


Figure: Best-fit lines for data with **Left:** no outliers and **Right:** outliers. Author: N. Khan (2021)

Robust Estimation via RANSAC

- ▶ In the presence of outliers, how can we fit a model *robustly*?
- ▶ One solution is the *RANdom Sample And Consensus* algorithm¹. Shortened as *RANSAC*.


Basic Idea

1. Choose a small subset of points uniformly at random.
2. Fit a model to that subset.
3. Find all points that are 'close' to the model and reject the rest as outliers.
4. Repeat step 1-3 many times and choose model with fewest outliers.

¹Fischler and Bolles, "Random Sample Consensus: A Paradigm for Model Fitting with Applications to Image Analysis and Automated Cartography".


Robust Line Fitting via RANSAC

- ▶ A line requires at least two points. The RANSAC algorithm applied to line fitting is as follows:
 1. **Sample:**
Pick any two points randomly.
 2. **Solve:**
Fit a line (m, c) between them.
 3. Consider data point (x_n, y_n) to lie on the line if $(y_n - mx_n - c)^2 < \tau_1$.
Such points are *inliers*.
Remaining points do not support this line. They are *outliers*.
 4. **Score:**
If ratio of inliers $> \tau_2$
 stop
else
 go to step 1

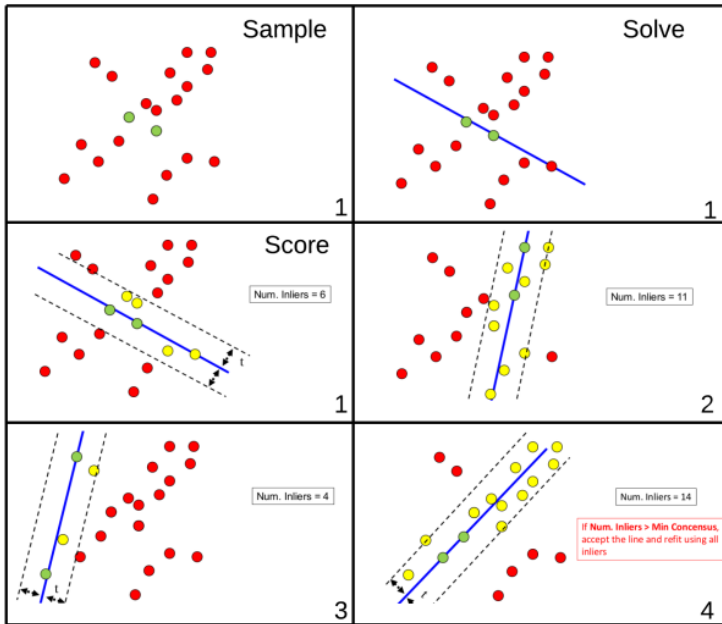



A data set with many outliers for which a line has to be fitted.

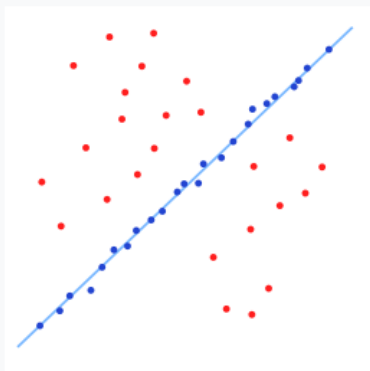

Fitted line with RANSAC; outliers have no influence on the result.

Figure: Source: https://en.wikipedia.org/wiki/Random_sample_consensus

Robust Estimation via RANSAC

In General

- ▶ The RANSAC algorithm can be applied to any general estimation problem in the presence of outliers.
- ▶ Denoting model parameters by θ , error function by $f(\theta)$ and assuming that minimum points required to fit the model is K , RANSAC is as follows:
 1. **Sample**: Pick any K points randomly.
 2. **Solve**: Fit the parameters θ for selected points.
 3. **Score**: If ratio of inliers ($f(\theta) < \tau_1$) is above a threshold τ_2 , then stop. Otherwise, go to step 1.
- ▶ Can be used to *robustly estimate* parameters of
 1. Affine Transformation
 2. Homography
 3. Fundamental Matrix

Robust Homography Estimation via RANSAC



Figure: Projective warping by homography estimated from all SIFT matches (inliers and outliers). Author: N. Khan (2018)

Robust Homography Estimation via RANSAC



Figure: Projective warping by homography estimated from inliers only. Author: N. Khan (2018)