

Project

- ▶ Explore and solve an interesting problem using ML on a real-world data set.

- ▶ 4 deliverables

Proposal	Start of 5th week	1 page
Milestone	1 week after mid-term exams	3-4 pages
Poster/Presentation	Two weeks before final exams	
Final report	One week before final exams	6-8 pages (NIPS format)

- ▶ Project ideas

- ▶ <http://cs229.stanford.edu/projects2016.html>
- ▶ <http://cs229.stanford.edu/projects2015.html>
- ▶ <http://cs229.stanford.edu/projects2014.html>
- ▶ www.cs.cmu.edu/~10701/projects.html
- ▶ www.kaggle.com
- ▶ Discuss with me

Proposal

- ▶ Maximum 1 page description containing
 - ▶ Project title
 - ▶ Data set
 - ▶ Project idea (approximately two paragraphs).
 - ▶ Software you will need to write or tool/libraries you will need to learn.
 - ▶ Papers to read. Include 1-3 relevant papers. You will probably want to read at least one of them before submitting your proposal.
 - ▶ Milestone description. What experimental results will you complete by the middle of the semester?
- ▶ Proposal will be rejected if you do not have the dataset available already.

Milestone

- ▶ Short report of 3-4 pages.
- ▶ Same sections as the final report (introduction, related work, method, experiment, conclusion), with a few sections "under construction".
- ▶ Specifically,
 - ▶ the introduction and related work sections should be in their final form
 - ▶ the section on the proposed method should be almost finished
 - ▶ the sections on the experiments and conclusions will have whatever results you have obtained, as well as "place-holders" for the results you plan/hope to obtain.

Poster and Presentation

- ▶ <https://www.sharelatex.com/learn/Posters>
- ▶ <https://www.sharelatex.com/templates/presentations>

Final report

- ▶ Must be in NIPS format and page limit.
 - ▶ [https://www.sharelatex.com/templates/journals/neural-information-processing-systems-\(nips\)-conference-2016](https://www.sharelatex.com/templates/journals/neural-information-processing-systems-(nips)-conference-2016)
- ▶ Think of it as a research paper being submitted to NIPS.


CS-667 Advanced Machine Learning

Nazar Khan

PUCIT

Probabilistic Linear Models for Classification

Machine Learning So Far ...

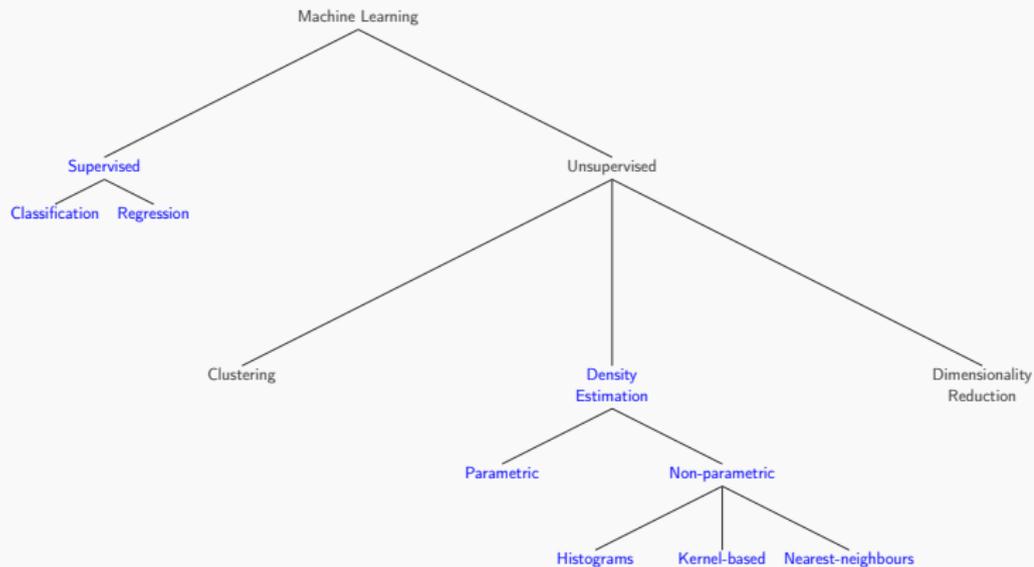

Linear Models for Classification

▶ Discriminant Functions

- ▶ Least Squares (\mathbf{w}^* via pseudoinverse)
- ▶ Fisher's Linear Discriminant ($\mathbf{w}^* = \arg \max_{\mathbf{w}} \frac{\mathbf{w}^T S_B \mathbf{w}}{\mathbf{w}^T S_W \mathbf{w}}$)
- ▶ Perceptron ($\mathbf{w}^{\text{new}} = \mathbf{w}^{\text{old}} + \eta t_n \phi_n$ for every misclassified sample x_n)

▶ Generative Models

- ▶ $p(C_k | \phi) = \frac{p(\phi | C_k) p(C_k)}{p(\phi)} = \frac{p(\phi | C_k) p(C_k)}{\sum_j p(\phi | C_j) p(C_j)}$
- ▶ Model class-conditional densities $p(\phi | C_k)$ and the priors $p(C_k)$ from data.
- ▶ We will not cover such models because
 1. they require too many parameters for high dimensional inputs
 2. perform poorly when assumed density models do not represent the data properly.

▶ Discriminative Models

- ▶ Since classification is based on posterior $p(C_k | \phi)$, model it directly.

Background Math

The Perceptron


$$f(a) = \begin{cases} 1 & \text{if } a > 0 \\ 0 & \text{if } a \leq 0 \end{cases}$$

where $a = \mathbf{w}^T \phi$. Note that the perceptron function is non-differentiable.

Background Math

Logistic Sigmoid Function

- ▶ For $a \in \mathbb{R}$, the *logistic sigmoid* function is given by
$$\sigma(a) = \frac{1}{1+e^{-a}}$$
- ▶ *Sigmoid* means S-shaped.
- ▶ Maps $-\infty \leq a \leq \infty$ to the range $0 \leq \sigma \leq 1$. Also called *squashing* function.
- ▶ **Can be treated as a probability value.**
- ▶ Symmetry $\sigma(-a) = 1 - \sigma(a)$. **Prove it.**
- ▶ Easy derivative $\sigma' = \sigma(1 - \sigma)$. **Prove it.**

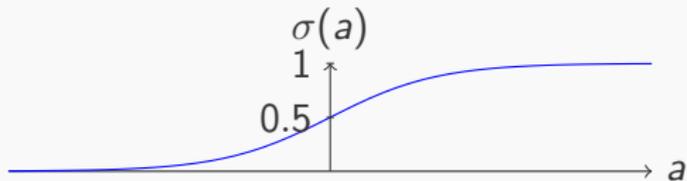

Background Math

Softmax Function

- ▶ For real numbers a_1, \dots, a_K , the *softmax* function is given by
$$\frac{e^{a_k}}{\sum_j e^{a_j}}.$$
- ▶ Softmax is ≈ 1 when $a_k \gg a_j \forall j \neq k$ and ≈ 0 otherwise.
- ▶ Provides a smooth (differentiable) approximation to finding the index of the maximum element.
 - ▶ Compute softmax for 1, 10, 100.
 - ▶ Does not work everytime.
 - ▶ Compute softmax for 1, 2, 3. (Solution: scale-up/scale-down)
 - ▶ Compute softmax for 1, 10, 1000. (Solution: subtract/add)
- ▶ Also called the *normalized exponential* function (for obvious reasons).
- ▶ Can be treated as probability values.
- ▶ Show that $\frac{\partial y_k}{\partial a_j} = y_k(\delta_{jk} - y_j)$. You must know this in order to understand later parts of the course.

Background Math

Positive Definite Matrices

- ▶ A square matrix \mathbf{M} is positive definite if *for every* non-zero vector \mathbf{x} , $\mathbf{x}^T \mathbf{M} \mathbf{x} > 0$.
- ▶ Positive semidefinite for the condition $\mathbf{x}^T \mathbf{M} \mathbf{x} \geq 0$.
- ▶ In 1D, a function f is convex if its second derivative f'' is always positive. This proves existence of *unique, global* minimum.
- ▶ In more than 1D, a function f is convex if its Hessian matrix (of second derivatives) \mathbf{H} is positive definite. This proves existence of *unique, global* minimum.

Stochastic Gradient Descent

- ▶ Gradient is a direction in parameter space that gives maximum increase in the value of a function.
- ▶ Moving in negative gradient direction leads towards local minimum.
- ▶ For $E(X, T, \mathbf{w}) = \sum_{n=1}^N E(\mathbf{x}_n, \mathbf{t}_n, \mathbf{w})$, we can reach \mathbf{w}^* using
 - ▶ Batch gradient descent: $\mathbf{w}^{\text{new}} = \mathbf{w}^{\text{old}} - \eta \nabla_{\mathbf{w}} E$
 - ▶ Stochastic gradient descent: $\mathbf{w}^{\text{new}} = \mathbf{w}^{\text{old}} - \eta \nabla_{\mathbf{w}} E_n$ where n is a single, randomly chosen data point.
 - ▶ Stochastic gradient descent using mini-batches:
 $\mathbf{w}^{\text{new}} = \mathbf{w}^{\text{old}} - \eta \nabla_{\mathbf{w}} E_B$ where B is a small batch of randomly chosen data points.

Discriminative Models for Classification

Logistic Regression

- ▶ For two classes, model via logistic sigmoid.
 - ▶ $p(C_1|\phi) = \sigma(\mathbf{w}^T \phi + w_0)$.
 - ▶ Leads to *logistic regression* for learning \mathbf{w}^* and w_0^* .
- ▶ For more than two classes, model via softmax.
 - ▶
$$p(C_k|\phi) = \frac{e^{\mathbf{w}_k^T \phi + w_{k0}}}{\sum_j e^{\mathbf{w}_j^T \phi + w_{j0}}}$$
 - ▶ Leads to *multiclass logistic regression* for learning \mathbf{w}_k^* and w_{k0}^* .
- ▶ In the following, we will absorb the bias term w_0 into the parameter vector \mathbf{w} and add a constant input $\phi_0(\mathbf{x}) = 1$ so that we can write activation simply as $a = \mathbf{w}^T \phi$.

Logistic Regression

Formulation

- ▶ Assume i.i.d. data $\{\phi_n, t_n\}_1^N$ with binary targets $t_n \in \{0, 1\}$.
- ▶ Model outputs via logistic sigmoid as $y_n = p(C_1|\phi_n) = \sigma(\mathbf{w}^T \phi_n)$.
- ▶ Likelihood can be written as

$$p(t_1, \dots, t_N | \mathbf{w}) = \prod_{n=1}^N y_n^{t_n} (1 - y_n)^{1-t_n}$$

- ▶ Negative log-likelihood becomes

$$E(\mathbf{w}) = -\ln p(t_1, \dots, t_N | \mathbf{w}) = -\sum_{n=1}^N t_n \ln y_n + (1 - t_n) \ln(1 - y_n)$$

which is also called the *cross-entropy* error function.

Logistic Regression

Gradient

- ▶ Gradient can be written as **(Prove it)**

$$\nabla_{\mathbf{w}} E(\mathbf{w}) = \sum_{n=1}^N (y_n - t_n) \phi_n = \sum_{n=1}^N \text{error}_n \times \text{input}_n$$

- ▶ Now stochastic gradient descent (SGD) can be used to find \mathbf{w}^* .
- ▶ However, the error function $E(\mathbf{w})$ is *convex* and therefore has a unique global minimum.
- ▶ Instead of gradient descent, we can use the more efficient iterative scheme known as the *Newton-Raphson* method.

Logistic Regression

Newton-Raphson Updates

- ▶ Newton-Raphson update for minimising *any* function $E(\mathbf{w})$ is given as

$$\mathbf{w}^{\tau+1} = \mathbf{w}^{\tau} - \mathbf{H}^{-1} \nabla_{\mathbf{w}} E(\mathbf{w})$$

where \mathbf{H} is the *Hessian matrix* composed of second derivatives $\frac{\partial^2 E}{\partial w_i \partial w_j}$.

- ▶ To apply Newton-Raphson updates to the cross-entropy error, we need the gradient $\nabla_{\mathbf{w}} E(\mathbf{w})$ as well as the Hessian

$$\mathbf{H} = \nabla_{\mathbf{w}} \nabla_{\mathbf{w}} E(\mathbf{w}) = \sum_{n=1}^N y_n (1 - y_n) \phi_n \phi_n^T$$

- ▶ Notice that Hessian \mathbf{H} depends on the current estimate \mathbf{w}^{τ} through its dependence on the y_n .

Logistic Regression

Newton-Raphson Updates

- ▶ **Take-home Quiz 1:** Using matrix-vector notation, show that
 1. The gradient can be written as $\Phi^T(\mathbf{y} - \mathbf{t})$ where Φ is the $N \times M$ design matrix, \mathbf{y} is the vector of per-sample outputs and similarly for targets \mathbf{t} .
 2. The Hessian \mathbf{H} can be written as $\Phi^T \mathbf{R} \Phi$ where \mathbf{R} is a diagonal $N \times N$ matrix with elements $R_{nn} = y_n(1 - y_n)$.
 3. \mathbf{H} is positive definite.

Logistic Regression

Newton-Raphson Updates

- ▶ We can now write the Newton-Raphson updates for minimising the cross-entropy error

$$\begin{aligned}
 \mathbf{w}^{\tau+1} &= \mathbf{w}^{\tau} - \mathbf{H}^{-1} \nabla_{\mathbf{w}} E(\mathbf{w}) \\
 &= \mathbf{w}^{\tau} - (\Phi^T \mathbf{R} \Phi)^{-1} \Phi^T (\mathbf{y} - \mathbf{t}) \\
 &= (\Phi^T \mathbf{R} \Phi)^{-1} (\Phi^T \mathbf{R} \Phi) \mathbf{w}^{\tau} - (\Phi^T \mathbf{R} \Phi)^{-1} \Phi^T (\mathbf{y} - \mathbf{t}) \\
 &= (\Phi^T \mathbf{R} \Phi)^{-1} \left\{ (\Phi^T \mathbf{R} \Phi) \mathbf{w}^{\tau} - \Phi^T (\mathbf{y} - \mathbf{t}) \right\} \\
 &= (\Phi^T \mathbf{R} \Phi)^{-1} \Phi^T \left\{ \mathbf{R} \Phi \mathbf{w}^{\tau} - (\mathbf{y} - \mathbf{t}) \right\} \\
 &= (\Phi^T \mathbf{R} \Phi)^{-1} \Phi^T \left\{ \mathbf{R} \Phi \mathbf{w}^{\tau} - \mathbf{R} \mathbf{R}^{-1} (\mathbf{y} - \mathbf{t}) \right\} \\
 &= (\Phi^T \mathbf{R} \Phi)^{-1} \Phi^T \mathbf{R} \underbrace{\left\{ \Phi \mathbf{w}^{\tau} - \mathbf{R}^{-1} (\mathbf{y} - \mathbf{t}) \right\}}_{\mathbf{z}} \\
 &= (\Phi^T \mathbf{R} \Phi)^{-1} \Phi^T \mathbf{R} \mathbf{z}
 \end{aligned}$$

Logistic Regression

Iterative Reweighted Least Squares

- ▶ This is the same as the solution to $\arg \min_{\mathbf{w}} \|\mathbf{R}(\Phi\mathbf{w} - \mathbf{z})\|^2$ which is a weighted least squares problem.
 - ▶ **How is it weighted least squares?**
 - ▶ **Show that the solution is $(\Phi^T \mathbf{R} \Phi)^{-1} \Phi^T \mathbf{R} \mathbf{z}$?**
- ▶ So the iterative Newton-Raphson updates correspond to weighted least squares with weight matrix \mathbf{R} .
- ▶ But weights depend on current \mathbf{w}^T and therefore weights are recomputed for every iteration.
- ▶ Therefore, these Newton-Raphson iterations are known as the *iterative reweighted least squares (IRLS)* algorithm.

Assignment 1

Iterative Reweighted Least Squares for Logistic Regression

- ▶ Implement the IRLS algorithm for logistic regression.
 - ▶ Code up a generic implementation.
 - ▶ Train it to classify between digits 3 and 8 from the MNIST digits training data.
 - ▶ Relevant material has been placed on `\\printsrv`.
 - ▶ Each sample is a 784×1 vector that represents a 28×28 image. To visualise the k -th training sample as an image, you may use the following commands:

```
imagesc(reshape(train_x(k,:),28,28)');  
axis image;  
colormap gray;
```
 - ▶ Report classification accuracy and confusion matrix on the testing data for the relevant classes.
- ▶ Submit your `_roll_number_LR.zip` containing code and `report.txt/pdf` explaining your results.
- ▶ Due Wednesday (March 07, 2018 before 5:30 pm) on `\\printsrv`.

Logistic Regression Tips

- ▶ In case you are having memory issues or training takes a lot of time, you might want to use the following tips:
 - ▶ Type in the command 'doc spdiags'
 - ▶ Do not use the `inv()` function to for matrix inverse. Use the `\` operator. For more help, consult Google or Matlab documentation.
- ▶ Also, don't forget to homogenise the inputs by appending a 1 at the end of each input. This will absorb the bias term.
- ▶ Lastly, if you start getting a warning message like "**Warning: Matrix is close to singular or badly scaled**"
 - ▶ First look at the difference between Exercises 1.1 and 1.2 from Chapter 1 and their solutions.
 - ▶ Then look at the programming solutions to both problems. We have done both the exercises as well as their programming solutions in CS 567.

Multiclass Logistic Regression

Formulation

- ▶ For $K > 2$ classes, model posterior via softmax.

$$p(C_k | \phi_n) = y_{nk} = \frac{e^{a_{nk}}}{\sum_j e^{a_{nj}}} = \frac{e^{\mathbf{w}_k^T \phi_n}}{\sum_j e^{\mathbf{w}_j^T \phi_n}}$$

- ▶ Trick to avoid $\frac{\infty}{\infty}$: use $y_{nk} = \frac{e^{a_{nk}-m}}{\sum_j e^{a_{nj}-m}}$ where $m = \max(a_{n1}, \dots, a_{nK})$. (How will y_{nk} be correct now?)
- ▶ Assume i.i.d. data $\{\phi_n, \mathbf{t}_n\}_1^N$ using 1-of- K coding for \mathbf{t}_n .

Multiclass Logistic Regression

Formulation

- ▶ Likelihood can be written as

$$p(\mathbf{t}_1, \dots, \mathbf{t}_N | \mathbf{W}) = \prod_{n=1}^N \prod_{k=1}^K p(C_k | \phi_n)^{t_{nk}} = \prod_{n=1}^N \prod_{k=1}^K y_{nk}^{t_{nk}}$$

- ▶ Negative log-likelihood becomes

$$E(\mathbf{w}) = -\ln p(\mathbf{t}_1, \dots, \mathbf{t}_N | \mathbf{W}) = -\sum_{n=1}^N \sum_{k=1}^K t_{nk} \ln y_{nk}$$

which is also called the *cross-entropy* error function for multiclass classification.

Multiclass Logistic Regression

Gradient

- ▶ Gradient is given by

$$\begin{aligned}
 \nabla_{\mathbf{w}_j} E(\mathbf{W}) &= - \sum_{n=1}^N \sum_{k=1}^K \frac{t_{nk}}{y_{nk}} \frac{\partial y_{nk}}{\partial a_{nj}} \frac{da_{nj}}{d\mathbf{w}_j} \\
 &= - \sum_{n=1}^N \sum_{k=1}^K \frac{t_{nk}}{y_{nk}} y_{nk} (\delta_{jk} - y_{nj}) \phi_n \\
 &= \sum_{n=1}^N (y_{nj} - t_{nj}) \phi_n = \underbrace{\sum_{n=1}^N \text{error}_n \times \text{input}_n}_{\text{as for log. reg.}}
 \end{aligned}$$

- ▶ This allows us to use SGD.

Multiclass Logistic Regression

Hessian

- ▶ As before, batch alternative is IRLS where the Hessian matrix can be computed in blocks of size $M \times M$ via

$$\nabla_{\mathbf{w}_k} \nabla_{\mathbf{w}_j} E(\mathbf{W}) = \sum_{n=1}^N y_{nk} (\delta_{jk} - y_{nj}) \phi_n \phi_n^T$$

- ▶ The Hessian is positive definite and therefore multiclass logistic regression too is a convex optimisation problem and has a unique, global minimiser \mathbf{W}^* .
- ▶ Newton-Raphson updates are

$$\mathbf{W}^{\tau+1} = \mathbf{W}^{\tau} - \mathbf{H}^{-1} \nabla_{\mathbf{W}} E(\mathbf{W})$$

- ▶ Note, however, that for high-dimensional spaces, SGD might be a better option memory-wise.

Assignment 2

SGD for Multiclass Logistic Regression

- ▶ Implement the SGD algorithm for multiclass logistic regression.
 - ▶ Code up a generic implementation.
 - ▶ Train it on the MNIST digits training data.
 - ▶ Report classification accuracy and confusion matrix on the testing data.
- ▶ Submit your `_roll_number_MLR.zip` containing code and `report.txt/pdf` explaining your results.
- ▶ Due on Wednesday (March 14, 2018 before 5:30 pm) on `\\printsrv`.